

# NT4


STEREO CONDENSER MICROPHONE

The NT4 is the perfect solution for creating studio-quality stereo recordings in any application. Two acoustically matched 1/2-inch condenser microphones are configured in a precise 90-degree X/Y configuration, delivering an accurate stereo audio image that is ideal for everything from drum overheads to sound design and Foley. For maximum flexibility, the NT4 can either be powered by P48 phantom power or a 9V battery, and both XLR and 3.5mm cables are included for use with either audio recorders or mixers as well as cameras.

- Stereo X/Y condenser microphone
- Acoustically matched 1/2-inch condenser capsules
- Ultra-low noise
- P48 phantom or 9V battery power operation
- XLR and 3.5mm cables included



DUAL POWER  
OPERATION



X/Y STEREO  
RECORDING



1/2" CONDENSER  
CAPSULE



## ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient
Directional Pattern:	Cardioid
Frequency Range:	20 Hz-20 kHz
Sensitivity:	-38 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance:	200Ω
Output Connection:	5 pin stereo XLR, Minijack (via included cable), and Dual 3-Pin XLR (via included cable)



RØDE

## MECHANICAL SPECIFICATIONS

Dimensions (millimetres):	Length: 231 Diameter: 41
Net Weight (grams):	480
Included Accessories:	RM3 stand mount WS4 windshield NT4-DXLR stereo XLR cable NT4-MJ XLR to 3.5mm stereo cable Zip pouch

## WHAT'S IN THE BOX



NT4



RM3



WS4



ZP2




Dual XLR




3.5mm cable

## DIMENSIONS

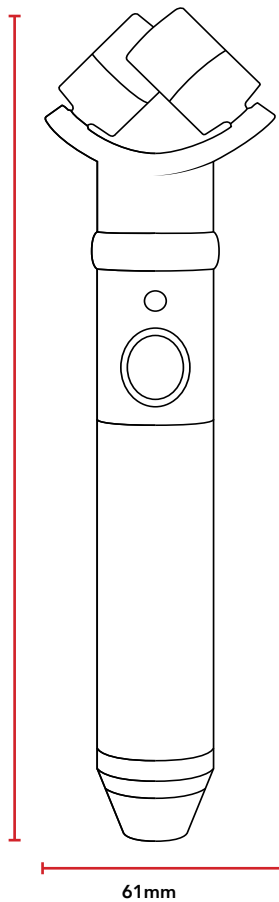

## POLAR PATTERN

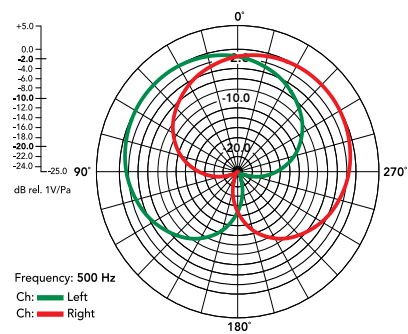

## FREQUENCY RESPONSE

