


The NT5 is a premium ½-inch diaphragm true condenser microphone designed for critical recording. It delivers a smooth, balanced sound with ultra-low self-noise, and its exceptionally accurate cardioid polar pattern and wide frequency response make the NT5 the perfect microphone for a wide range of recording applications.

- Externally biased condenser
- Gold-sputtered 1/2" capsule
- Heavy-duty satin-nickel plated body
- Ultra-low self-noise
- Full frequency response
- Also available in an acoustically matched pair





ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient		
Polar Pattern:	Cardioid		
Frequency Response:	20Hz - 20kHz		
Sensitivity:	-38 dBV (12 mV @ 94 dB SPL)		
Output Impedence:	100Ω		
Equivalent Noise:	16dBA		
Maximum SPL:	143 dB SPL		
Power Requirement:	P48 phantom power		
Analog Outputs:	3 pin XLR, balanced output between Pin2 (+), Pin 3 (-) and Pin 1 (ground)		
Output Connectivity:	XLR		





MECHANICAL SPECIFICATIONS

Compatible Accessories for Single Set:

110

Height: 145

1 x NT45-O

2 x NT45-O 2 x RM5 Mic Clip

1 x RM5 Mic Clip 1 x WS5 windshield

2 x WS5 windshield 1 x ZP1 Zip Pouch

Width: 20 Diameter: 20

Weight (grams):

for Matched Pair:

Dimensions (millimetres):

WHAT'S IN THE BOX

S II S	NT5		
		1 NITE	

1 x NT5



1 x WS5




1 x ZP1

1 x RM5

DIMENSIONS

POLAR PATTERN

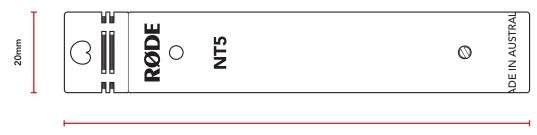


270

118mm

^{45.0} ^{40.0} ^{40.0}

FREQUENCY RESPONSE

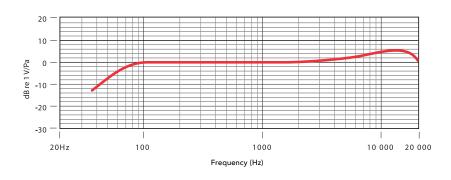

RØDE