

NTG3


PRECISION BROADCAST-GRADE SHOTGUN MICROPHONE

The NTG3 is a broadcast-grade shotgun microphone designed for the most demanding shoots that require high-resolution broadcast audio. It features RF-bias technology that yields superior resistance to moisture and condensation, making it suitable for outdoor shoots in adverse conditions. The NTG3 has a rich, warm sound and a tightly controlled polar pattern with exceptional off-axis performance and no coloration. It is also highly regarded for voice-over work, where its natural tone and punch deliver exceptional performance for a wide range of voice types.


- Broadcast-grade RF-bias shotgun microphone
- Highly resistant to moisture and condensation
- Tightly controlled directional pick-up without off-axis coloration
- Available in satin-nickel or matte black finish



BROADCAST
QUALITY




HIGHLY
DIRECTIONAL

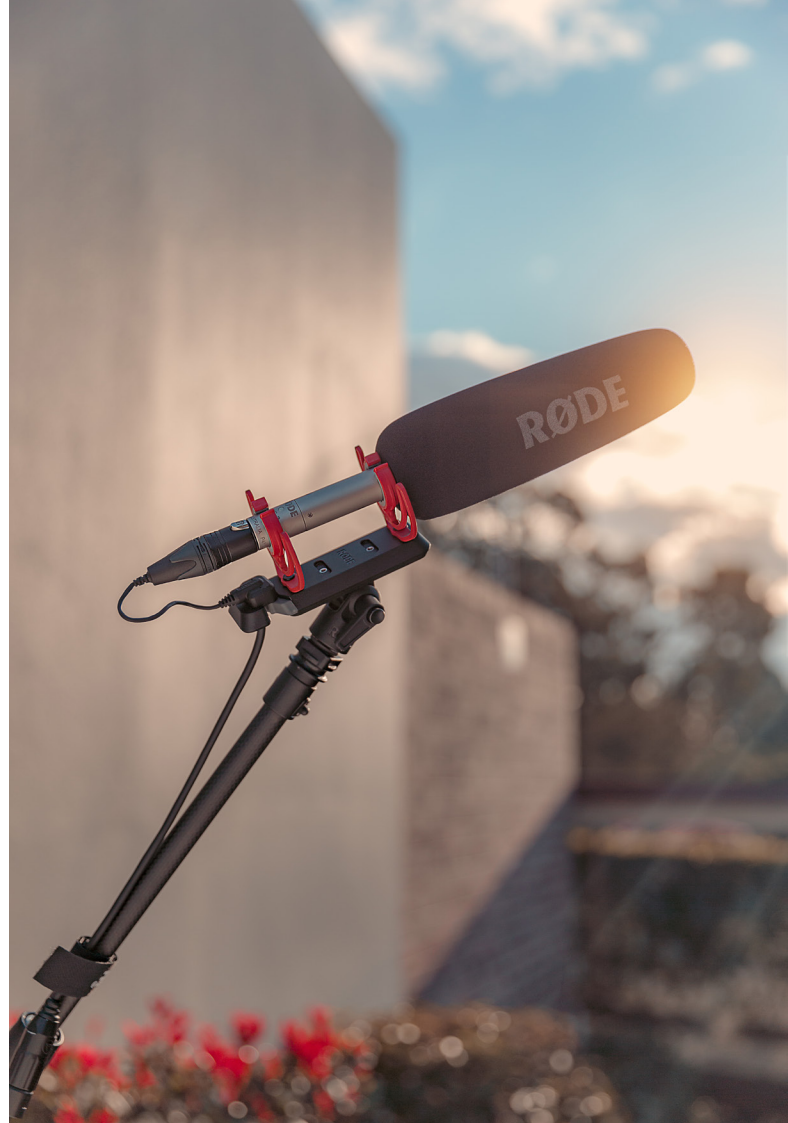

ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Line Gradient
Polar Pattern:	Supercardioid
Frequency Range:	40Hz ~ 20,000Hz
Sensitivity:	-30dB \pm 2dB re 1V/Pa @ 1kHz
Nominal impedance:	25 Ω
Equivalent Noise (A-weighted):	13dBA SPL
Maximum Output:	+8.2dBu
Dynamic Range:	117dB (per IEC651)
Max Input SPL:	130dB (@ 1kHz)
Signal/Noise (A-weighted):	81dB
Power Requirements:	48V Phantom Power (44-52V min 5mA)
Output Connection:	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)



Black




Silver

RØDE

MECHANICAL SPECIFICATIONS

Weight (grams):	163
Dimensions (millimetres):	W 19 H 255

WHAT'S IN THE BOX



1 x NTG3



1 x Storage Cylinder



1 x Windshield




1 x ZP2




1 x RM5

DIMENSIONS

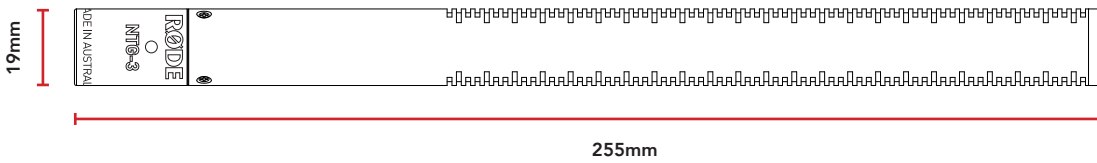

POLAR PATTERN

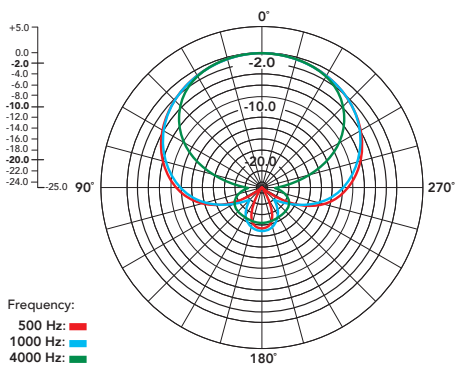

FREQUENCY RESPONSE

