


RØDELink LAV is a professional-grade wearable microphone designed for use in a wide range of applications. The locking TRS connector is designed to pair perfectly with the RØDELink range of wireless microphones and most recorders with a 3.5mm locking microphone input.

- Professional-grade lavalier mic with 3.5mm TRS locking connector
- High-quality omnidirectional condenser capsule
- Discreet 4.5mm miniature microphone
- Kevlar® reinforced cable
- Includes pop shield and durable mounting clip







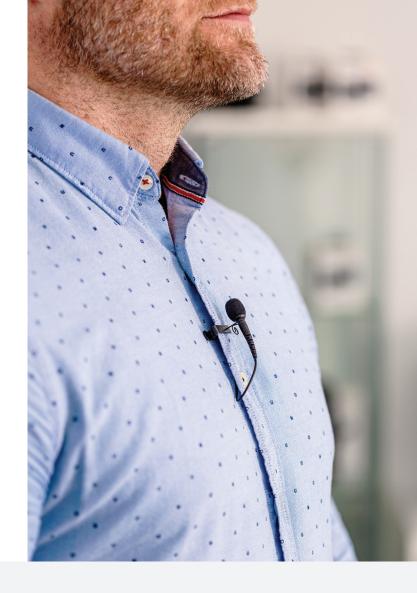

ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Permanently Polarised
Polar Pattern:	Omni-directional
Frequency Range:	20Hz - 20kHz
Maximum SPL:	110 dB SPL (@1kHz, 1% THD into 1 Ω load)
Sensitivity:	-33.5db re 1 Volt/Pascal (21.00mV @ 94dB SPL) ± -2dB @ 1kHz
Dimensions:	1200.00mmH x 4.50mmW x 4.50mmD
Output Impedance:	3K $Ω$ Typical
Signal to Noise Ratio:	67 dB
Equivalent Noise:	27 dB Typical
Dynamic Range:	83 dBA Typical







DIMENSIONS

MIC

5mm

40mm

POLAR PATTERN

