

S1

Live Performance Condenser Microphone

RODE[®]

MICROPHONES


Features

- Studio quality live condenser microphone
- Feedback rejecting super-cardioid pick up pattern
- Rugged all metal construction
- Heat treated high-strength head
- Available in satin-nickel (S1) or black (S1-B)
- Low handling noise
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

| | | | |
|--------------------|--|---------------------|--|
| Acoustic Principle | Pressure gradient | Directional Pattern | Super-Cardioid |
| Frequency Range | 20Hz ~ 20,000Hz | Sensitivity | -46dB \pm 2dB re 1V/Pa (5mV @ 94 dB SPL) @ 1kHz |
| Nominal Impedence | 50 Ω | Equivalent Noise | 18dBA SPL (A - weighted per IEC651) |
| Maximum Output | +12.5dBu (@ 1% THD into 1k Ω) | Dynamic Range | 132dB (per IEC651) |
| Maximum SPL | 151dB (@ 1kHz, 1% THD into 1k Ω load) | Signal/Noise | 75dB SPL (A - weighted per IEC651) |
| Power Req. | 48V Phantom Power | Dimensions | Length - 183mm Diameter - 52mm |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) | Shipping Weight | 580g |
| Net Weight | 308g | | |

Frequency Response

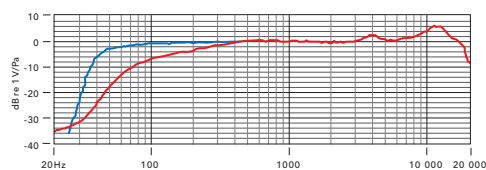

Polar Pattern



Included Accessories

- RM1 stand mount
- ZP1 zip pouch

