

# SC6-L Mobile Interview Kit


DUAL SMARTLAV+ MICROPHONES AND SC6-L MOBILE INTERFACE FOR APPLE DEVICES



DESIGNED FOR  
APPLE DEVICES



HEADPHONE  
OUTPUT JACK



DUAL TRRS  
CONNECTION

The SC6-L Mobile Interview Kit records broadcast-quality 2-person interviews on your Apple® device anywhere, anytime. The SC6-L TRRS-to-Lightning adapter connects with 2 SmartLav+ microphones for easy recording and includes a headphone output for live monitoring.


- 2 x 3.5mm TRRS Microphone Inputs for Lightning connection
- 3.5mm Headphone Output
- Pairs with RØDE Reporter App
- App allows configuration of:
  - Record Mode (Stereo/Separate)
  - Direct Monitoring on/off
  - Mic Pre gain




## SPECIFICATIONS

Acoustic Principle:	Permanently Polarised Condenser
Active Electronics:	JFET
Polar Pattern:	Omn-directional
Frequency Response:	SC6L: 20Hz - 20 kHz SmartLav+: 60 Hz - 18 kHz
Signal to noise Ratio:	69 dB
Equivalent Noise:	25 dB Typical
Maximum SPL:	n/a
Power Requirement:	Powered from iPhone Lightning Port
Output Connection:	SC6-L: 3.5mm Headphone Output SmartLav+: Gold-plated TRRS plug
Analog Outputs:	3.5mm TRS Headphone Output
Computer Connectivity:	Lightning (iPhone/iPad/iPod)
Simultaneous I/O:	2/2
Bit Depth:	24-bit
Sample Rates:	44.1/48 kHz
Direct Monitor:	Yes
Bus Powered:	Yes
OS Requirements:	iOS 11 and higher
Material:	PC and ABS Plastic
Colour:	Black
Weight:	53g
Packed Weight:	113g
<div style="border: 1px solid black; padding: 2px; display: inline-block;">                     Made for   iPhone   iPad   iPod                 </div>	
<b>IN THE BOX</b> (1) SC6-L, (2) SmartLav+	


Front view

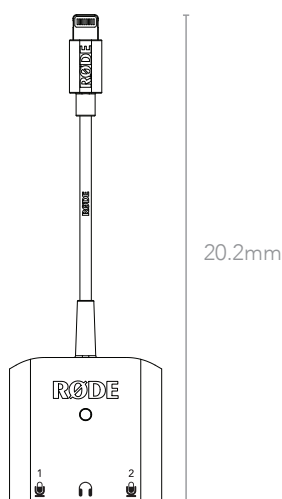


Side view



Back view

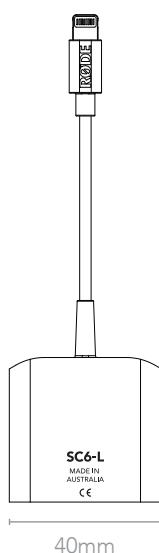

## POLAR PATTERN



## FREQUENCY RESPONSE

